

SUMO PRO-19

Let's get started



ATOMOS

Introduction

Thank you for purchasing the Atomos **Sumo PRO-19**, the on-set 19-inch, 4K HDR monitor-recorder-switcher for professional video production. Please take the time to read through this Quick Start Guide and register your product at www.atomos.com for extended warranty, special promotional offers and free access to **ATOMOSphere**, your personal cloud solution for storing, managing and sharing your media files.

Notifications



USA WARNING: This product contains the chemical lead (Pb) which is known to the State of California to cause cancer. For more information, visit p65warnings.ca.gov

What's in the box

- ✓ 1 x Sumo PRO-19 monitor-recorder-switcher
- ✓ 2 x Wi-Fi antennas
- ✓ 5 x antenna tips (black, white, yellow, green, red)
- ✓ 1 x AirGlu antenna
- ✓ 3 x antenna caps
- ✓ 1 x XLR 4 power supply
- ✓ International IEC power cables
- ✓ Desktop feet & screws
- ✓ Batt wing & screws
- ✓ Screen cloth
- ✓ HEX key

You might also need (sold separately)

Sumo PRO-19 Power Adaptor (ATOMPWR024)

An AC-to-DC power adapter designed to serve as a secondary power source for the Sumo PRO-19, enabling power redundancy and ensuring uninterrupted operation.

Safety Instructions

Sumo PRO-19 is designed to a high standard, but there are some things you should be aware of for your own safety, and that will prolong the life of the device.

Using Sumo PRO-19 safely

Sumo PRO-19 is a rugged and solid object that could cause injury if misused.

- Always make sure that your Sumo PRO-19 is mounted securely.
- Always ensure that cables connected to Sumo PRO-19 are clearly visible and do not present a trip hazard.
- Do not place on uneven or unstable surfaces.
- Do not insert anything other than a CFexpress Type B card into the drive slot on the front of the device.
- Do not obstruct or cover ventilation holes.
- Do not touch the Sumo PRO-19 screen with sharp, metallic or abrasive objects.
- Do not expose it to strong electrical or magnetic fields.
- Do not expose it to liquids, rain or moisture.
- Do not dispose of Sumo PRO-19 in municipal waste and do not incinerate it. Always follow local regulations for safe disposal.

Warranty & Conditions

Notice

Copyright © 2026 Atomos. All rights reserved. All information in this document is subject to change without notice. No part of the document may be reproduced or transmitted in any form, or by any means, electronic or mechanical, including photocopying or recording, without the express written permission of Atomos. A reference to Atomos includes its related entities, subsidiaries and parent company.

Trademarks

Sumo PRO-19 / Atomos are registered trademarks of Atomos. All other trademarks are the property of their respective holders.

International Hardware Limited Warranty

Atomos warrants that:

- The main product, not including the IPS screen, or any external accessories, will be free from defects in materials and workmanship for a period of TWO years from the date of purchase; *upon completion of product registration within ONE year of the date of purchase at www.atomos.com.*
- The LCD touchscreen will be free from defects in materials and workmanship for a period of ONE year from the date of purchase, regardless of registration. This warranty is exclusively for the benefit of the original purchaser and is not assignable or transferable.

Warranty & Conditions

If during the warranty period the product is shown to be defective Atomos may, at its discretion:

- a) replace the goods or supply equivalent, or
- b) pay the cost of replacing the goods or of acquiring equivalent. The customer must notify Atomos of any defect in the goods in writing prior to the expiry of the warranty periods set out above. The customer will be solely responsible for returning the goods to Atomos or its authorized distributor. Upon acceptance of a warranty claim by Atomos, where Atomos replaces the goods, it will be responsible for reasonable shipping costs incurred in sending the goods to the customer, provided that customer is located in a country in which Atomos has an authorized distributor or agent.

Warranty Exclusions

This warranty does not cover defects caused by:

- Failure to comply with the operating instructions issued by Atomos
- Neglect
- Improper or negligent acts or omissions
- Unauthorized repairs or attempted repairs
- Tampering with, or modification of, the goods
- Connection to incompatible equipment or power sources
- Exposure to water or inclement weather
- Exposure to magnetic fields or corrosive liquids or substances

EXCEPT AS STATED IN THIS WARRANTY, ATOMOS, ITS VENDORS, AGENTS, RESELLERS AND DISTRIBUTORS DISCLAIM IN THEIR ENTIRETY ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ALL WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THE REMEDIES OUTLINED IN THIS WARRANTY ARE THE EXCLUSIVE REMEDY A CUSTOMER HAS ARISING FROM DEFECTIVE GOODS WHICH ARE SUBJECT TO THE WARRANTY. ATOMOS DOES NOT WARRANT THAT THE GOODS WILL OPERATE IN A MANNER WHICH IS ERROR FREE, OR UNINTERRUPTED. THE GOODS ARE NOT INTENDED TO BE THE PRIMARY OR ONLY DATA STORAGE DEVICE FOR DATA – CUSTOMERS ARE SOLELY RESPONSIBLE FOR BACK UP AND PROTECTION OF DATA.

Warranty & Conditions

Software License Agreement

IMPORTANT, PLEASE READ CAREFULLY. THIS IS A LICENSE AGREEMENT.

This Atomos software, related documentation, any included sample images and other files (the "Software"), is protected by copyright laws and international copyright treaties, as well as other intellectual property laws and treaties. The Software is licensed, not sold.

This End User License Agreement ("EULA") is a legal agreement between you (either an individual or a single entity) and Atomos with regard to the copyrighted Software provided with this EULA. Use of the Software provided to you by Atomos in whatever form or media, will constitute your acceptance of these terms, unless separate terms are provided by the software supplier, in which case certain additional or different terms may apply. If you do not agree with the terms of this EULA, do not download, install copy or use the Software. By installing, copying or otherwise using the Software, you agree to be bound to the terms of this EULA. If you do not agree to the terms of this EULA, Atomos is unwilling to license the Software to you.

1. Eligible licensees. This Software is available for license solely to purchasers of the Atomos Sumo PRO-19, who have purchased a unit from Atomos or from an Atomos authorized reseller, with no right of duplication or further distribution, licensing or sub-licensing.
2. License Grant. Atomos grants you a personal, non-transferable and non-exclusive right to use the copy of the Software provided with this EULA. You agree you will not copy the Software except as necessary to use it with the Atomos Sumo PRO-19. You agree that you may not copy the written materials accompanying the Software. Modifying, reverse engineering, translating, renting, copying, transferring or assigning all or part of the Software or any rights granted hereunder, to any other persons or reverse engineering the hardware on which the Software runs, is strictly prohibited. The software is license, not sold. You acknowledge that no title to intellectual property in the Software is transferable to you. You

further acknowledge that title and full ownership rights to the Software will remain the exclusive property of Atomos and/ or its suppliers, and you will not acquire any rights to the Software, except as expressly set forth above. All copies of the software will contain the same proprietary notices as contained in or on the Software. All title and copyrights in and to the Software (including but not limited to any images, animations, video, audio, text incorporated), the accompanying printed materials, and any copies of the Software are owned by Atomos or its suppliers.

3. Reverse engineering. You agree that you will not attempt, and if you are a corporation, you will use your best efforts to prevent your employees and contractors from attempting to reverse compile, derive circuits, modify, translate or disassemble the Software and/or the Atomos Sumo PRO-19 in whole or in part. Any failure to comply with the above or any other terms and conditions contained herein will result in the automatic termination of this license and the reversion of the rights granted hereunder by Atomos.

Atomos reserves the right to terminate this license without prejudice to any additional recourse Atomos may have against you if you violate any of its terms and conditions.

Hardware Features

A. Screw Mounts

3/8" screw hole with 1/4" adapter threaded mounting points. Multi-point arrays for secure anti-twist attachment of accessories and mounting hardware.

B. Remote Control and Calibration

Used for calibration with compatible third-party probes. Requires USB-C to serial cable (sold separately – ATOMCAB018). Visit atomos.com/calibration for more information.

C. Headphone/Analog Output

3.5mm TRRS headset jack used to connect headphones or headset.

D. CFexpress Slot

For supported CFexpress Type B media, visit:
atomos.com/sumo-pro-certified

E. Desktop Feet

Removable feet for free-standing use with front and rear mounting holes for optional additional securing.


F. Programmable Function Buttons

User-assignable buttons for quick access to frequently used functions.

G. On/Off + Screen Lock

To turn Sumo PRO-19 on, press the power button on the side of the unit.
To shut down, hold the button for at least 4 seconds (until unit turns off).

Sumo PRO-19 Front View

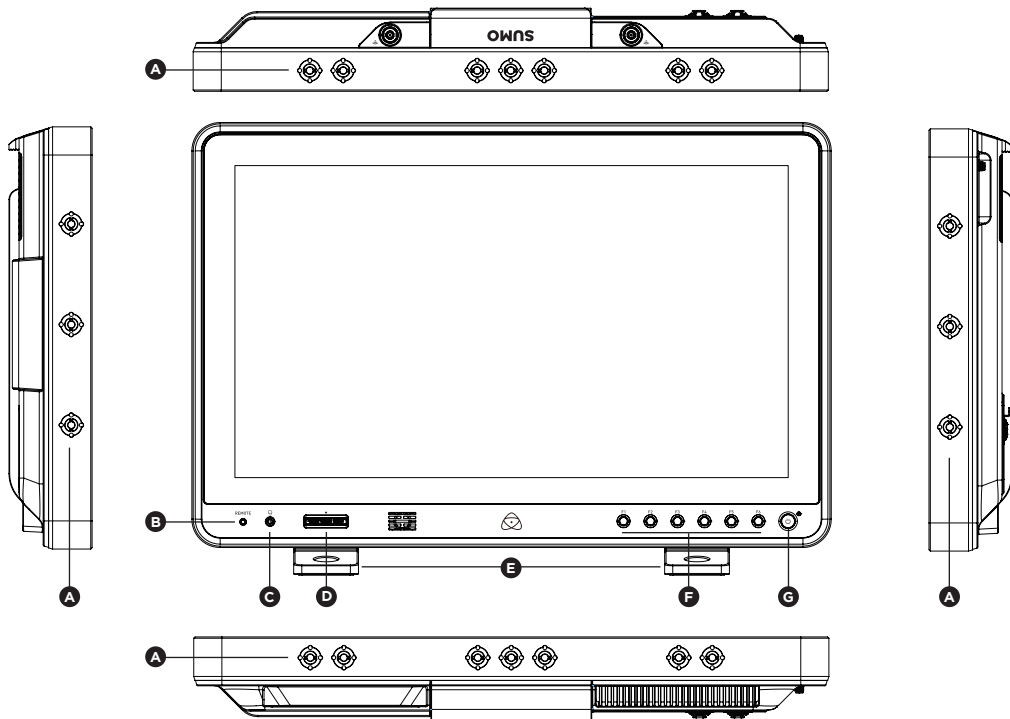

Hardware Features

H. RF Antenna

Connect the supplied RF antenna for wireless AirGlu functionality with UltraSync ONE (sold separately – ATOMSYON01), or UltraSync BLUE (sold separately – ATOMSYBL01).

I. Battwing

Removable mounting plate. Supports attachment of V-Mount battery plates, ensuring secure mounting and rear vent clearance.

J. Audio In (Line, Mic, Mic +48v)

XLR/TRS combo inputs for line-level or microphone sources, with selectable 48 V phantom power for compatible microphones.

K. Audio Out

XLR outputs for monitoring. The audio channel routed to each output can be selected via the Headphone settings in the Audio menu.

L. DC In

XLR-4 connection for included power supply. When using a third-party power supply, ensure GND (–) to Pin 1 and (+) to Pin 4. Sumo PRO-19 features Atomos Continuous Power technology which uses power source looping for uninterrupted switching between power sources during use, including between DC and battery sources.

M. Dual Battery Connection

Sumo PRO-19 can be powered by V-Lock batteries via the XLR terminal. It features Atomos Continuous Power technology which uses battery looping for uninterrupted switching between power sources during use. You may also use two DC supplies to power the monitor connected to any of the DC/Battery inputs.

N. Screw Mounts

3/8" screw hole with 1/4" adapter threaded mounting points. Multi-point arrays for secure anti-twist attachment of accessories and mounting hardware.

O. HDMI 2.0 In/Out

HDMI 2.0 input supports recording up to 4Kp60. HDMI output provides live loop out or play-out when in playback mode up to 4Kp60 video.

P. 4K/HD-SDI In

12G-SDI input connections, backward compatible to 6G, 3G & 1.5G signals. Supports 3G-SDI level A & B, can be used to input RAW from supported cameras.

Q. HD-SDI In

3G compliant SDI input connections. The SDI inputs support 3G in both level A and B standards. This input is also used to input RAW signals from supported cameras.

R. 4K/HD-SDI Out

Output to an external monitor or other device. Provides loop-through of the incoming SDI or HDMI signal in record and standby mode, and playback when Shogun AV is in playback mode. 4K or HD output, with down scale HD if required. SDI <=> HDMI cross-conversion is always live allowing for instant conversion.

S. USB-C Ports

Used to attach external USB-C media. Please visit atomos.com/sumo-pro-certified for supported devices.

T. Sync Connection

Input only reference signal for locking internal timing to an external source during play back. Can also be used as a LTC timecode input, allowing multiple devices to share the same master timecode signal, for multi-camera setups. LTC is available in Record mode and configured via the Timecode menu.

U. RJ45 Ethernet Port

Ethernet port for a high-speed & robust hardwired network connection for cloud and NDI workflows and over-the-air firmware updates.

V. Tally Light

The red tally light on the rear of the unit indicates active recording. The tally light can be turned off in the menu options.


W. Wi-Fi Antennas

Connect the supplied Wi-Fi antennas in this position.

X. Built-in handle

To ensure that Sumo PRO-19 can be lifted, transported, and repositioned with confidence.

Sumo PRO-19 Rear View

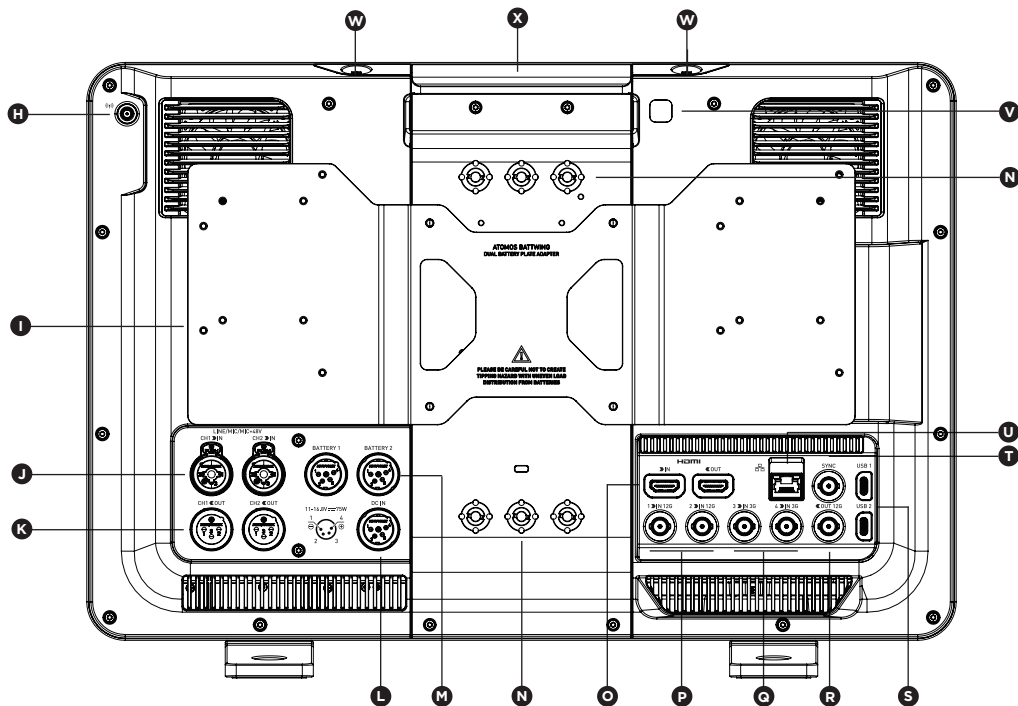

Device Registration

Activate extended warranty, receive special offers and regular product updates.

my.atomos.com

ATOMOSphere

Your personal cloud solution for storing, managing and sharing your media files.

atomosphere.com

Support

If you experience any issues using Sumo PRO-19, or have an unanswered question don't hesitate to reach out.

atomos.com/support

Further Information

Scanning the QR code takes you to the FAQ page on our website where you can read up on the products documentation.



For more information
about your product visit
atomos.com/support